

Number of contacts

2



Han

Features


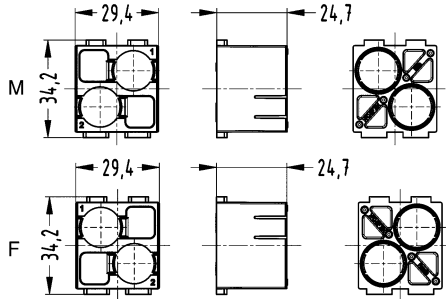
- for the transmission of clean and dry compressed air
- Operating pressure up to 10 bar (145 psi)
- Female contacts with / without shut-off
- Removal of tubes from pre-assembled pneumatic contacts is possible

Technical characteristics

Number of contacts	2
Limiting temperature	-40 ... +85 °C
Mating cycles	≥10000
Material (insert)	Polycarbonate (PC)
Colour (insert)	Blue
Material flammability class acc. to UL 94	V-0

Specifications and approvals

IEC 61984
EN 60664-1

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® Pneumatic module  Please order contacts separately.	09 14 002 3501	09 14 002 3502	


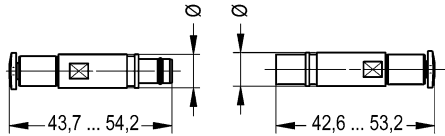



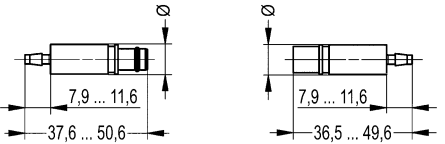


Han

Technical characteristics

Technical characteristics

Limiting temperature -20 ... +85 °C Tube outer diameter
-40 ... +85 °C

Tube inner diameter 8 mm, 10 mm
Tube outer diameter 8 mm, 10 mm
Material (seal) NBR
Material (contacts) Brass

Identification		Part number		Drawing (dimensions in mm)
		Male	Female	
Pneumatic contact, Without shut-off, Straight, Tube outer diameter 	10 mm 8 mm	09 14 000 6350	09 14 000 6450	
		09 14 000 6358	09 14 000 6458	
Pneumatic contact, With shut-off, Straight, Tube outer diameter 	10 mm 8 mm		09 14 000 6460	
			09 14 000 6468	
Pneumatic contact, Without shut-off, Straight, Tube inner diameter 	10 mm 8 mm	09 14 000 6310	09 14 000 6410	
		09 14 000 6308	09 14 000 6408	
Pneumatic contact, With shut-off, Straight, Tube inner diameter 	10 mm 8 mm		09 14 000 6411	
			09 14 000 6418	